



## Three-Piece, Raintight Conduit Couplings

**1/2" Thru 4" Trade Sizes**




<b>Catalog Numbers:</b>	1121-RT thru 1130-RT
<b>Description:</b>	3 Piece Raintight Couplings
<b>Application:</b>	Join lengths of threaded rigid or IMC conduit
<b>Material:</b>	Malleable Iron
<b>Finish:</b>	Zinc Electro-Plated
<b>Certifications:</b>	
NEMA Standard:	FB-1
UL Standard:	UL514B
UL File Number:	E9391
UL Standard:	UL514B
Federal Specs:	A-A-50553 & W-F-408E
UNSPSC:	30211709

### Dimensions (1/2" Shown)

Dimension A: 1 3/4"

Dimension B: 1 7/8"

Dimension C: 1 1/8"

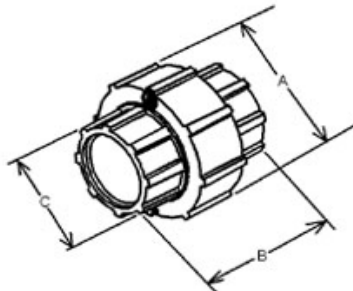

### Features

- NPT Tapered Threads
- Self Aligning Union
- UL Listed Concrete Tight and Raintight (Vertically and Horizontally)
- Recessed BUNA-N O-Ring Seal for Watertight and Raintight Connection
- Couples Conduits When Conduits Cannot Be Turned
- Provides Easy Access Point to Raceway System
- Smooth Interior
- Easy to Install
- Patented